




GENERAL DESCRIPTION

- CD3000E 2PH is a Full digital and universal Thyristor unit based on a very powerful dedicated micro configurable via serial communication port for all inputs, firing modes, control modes and loads types.
- Integrated fixed fuses and all what is necessary to have a complete power control zone including current transformer and optional circuit board
- Two leg switching three wires load star or delta connections.
- Suitable to drive resistive loads and three phase transformer.
- Frontal Key Pad to control the unit and to read power, current and voltage value.
- Universal Input signal with automatic zero/span calibration.
- Universal Firing modes, customer configurable via Rs485 comm. Modbus or communication port as Burst Firing, Single Cycle and Delayed Triggering.
- Power, voltage and current control mode
- Unbalanced load and Heater Break Alarm.
- RS 485 port. Modbus protocol.
- Comply with EMC CE and UL
- IP20 Protection

TECHNICAL SPECIFICATION


Operating Temperature	0+40°C over this temperature see derating curve
Voltage Power supply	Range 330V to 480V, 600V on request
Auxiliary Voltage Supply	90÷265V; 20VA power consumption. Fan voltage supply: 230V ±15% as a standard and 110V on request.
Analog Input 1	Primary reference, Current Input 4÷20mA, 500 Ohm, Voltage Input 0÷10V, 40 KOhm Potentiometer input 10K min.
Analog Output	n. 1 analog output 0÷10V or 4÷20 mA, to retransmitted One of this value Current, Voltage or Power that is used as Control Mode
Digital Input	Four optoisolated digital input (12÷24Vdc), for START, STOP, CALIBRATION and RESET ALARM
Digital Output	Two optoisolated digital output 12Vdc
Relay Output	Critical alarm
Universal Firing	One of these firing modes can be configured on line via serial port: Burst Firing BF, Single Cycles SC, Delayed Triggering
Control Mode	Voltage (V) and Power (VxI) and current (I)
Heater Break Alarm	Circuit microprocessor based to diagnose partial or total load failure and short circuit on Thyristors
Unbalanced load	This protection allow to have CD3000E working up to 20% of unbalance on one of phases.
Communication	RS485 Port. Modbus communication protocol 9600 or 19200 bauds
Thermal protection	Available on forced ventilated units
Fuses	Hight speed fuses fitted internally
Mounting	Panel mounting. IP20 Protection.

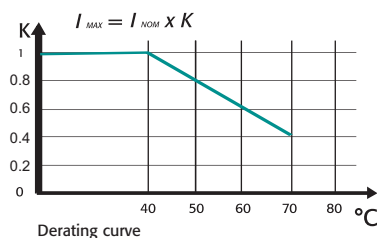

OPTION'S FEATURES AND SPECIAL DETAILS

HEATER BREAK ALARM HB

ON FRONT CABINET

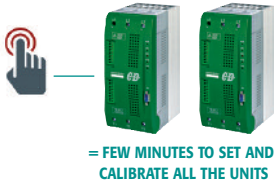

The Heater Break circuit diagnostic partial or total load failure. It reads load resistance with an internal voltage transducer and current transformer to calculate the resistance value V/I .


The Heater Break circuit is compensated for voltage fluctuation, in fact a voltage variation has no influence on resistance value because V/I ratio remain constant.

On this unit is possible to set the nominal current value and the alarm sensitivity.

HB alarm in addition diagnostic the thyristor in short circuit.


A normally open contact gives the alarm condition and an indication of the alarm type appears on display.

BURST FIRING BF

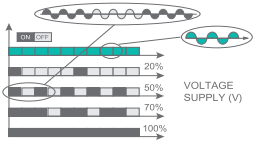

This firing is performed digitally within the thyristor unit at zero volts, producing no EMC interference. Analogue input is necessary for BF and the number of complete cycles must be specified for 50% power demand. This value can be between 1 and 255 complete cycles, determining the speed of firing. When 1 is specified, the firing mode becomes Single Cycle (SC).

DELAYED TRIGGERING DT

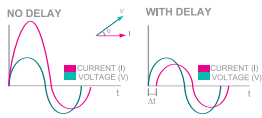

Used to switch the primary coil of transformers when coupled with normal resistive loads (not cold resistance) on the secondary, DT prevents the inrush current when zero voltage (ON-OFF) is used to switch the primary. The thyristor unit switches OFF when the load voltage is negative and switches ON only when positive with a pre-set delay for the first half cycle.

CD EASY



This is a memory support tool that can be used by maintenance personnel on shop floor.

The user can copy the configuration of one unit and paste it into another. CD EASY is very simple with one push button to upload the configuration (Read) and another to download the stored configuration (Write)

This tool can be used with our Remote service to mail the working configuration via internet.

FIELD BUS MODULE




CD-RS Used to convert RS232 to RS422

TU-RS485-PDP Used to convert RS485 Modbus to Profibus DP

TU-RS485-ETH Used to convert RS485 Modbus to Ethernet

For more informations see "Field Bus Module"

POWER SCALING



It's a scaling factor of the input command signal and limit the output of Thyristor unit. This parameter can be adjusted from 1 to 99% via RS485 or by the front of the unit. If this parameter is set at 50% and the input signal is 100% the output become 50%. This feature is very useful to reduce the power when a zone has been oversized or when a temperature controller gives same reference to more unit along a furnace.


Imagine 3 zones with left and right one close to the door where in a continuous furnace the material come into and flow out. The profile of temperature along furnace is higher in central zone because there is less dispersion but if we scale its input we can have a flat profile.

APPLICATIONS AND FOCUS ON:


- Infrared lamp.
- Autoclaves.
- Furnaces.
- Chemical
- Petrochemical
- Climatic chambers
- Pharmaceutical

WIRING CONNECTION CD3000E 2PH from 35 to 700A


CD3000E Size S09/S10

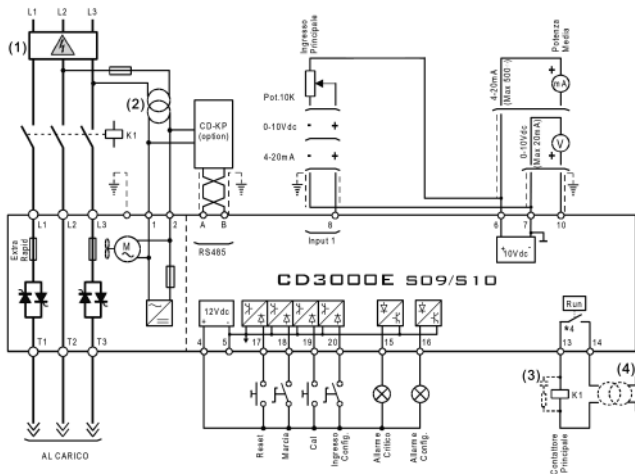

CD3000E Size S14

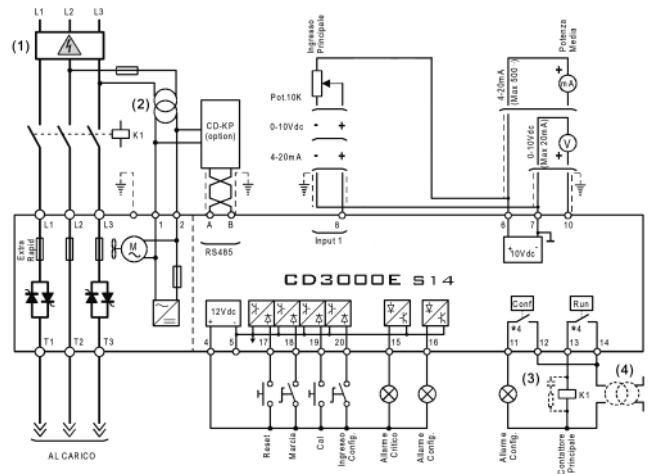


LOAD TYPE



STAR without neutral
Resistive or
Infrared Lamps
Long and
medium waves

LOAD TYPE




DELTA
Resistive or
Infrared Lamps
Long and
medium waves


NOTE

- (1) • The user installation must be protecting by electromagnetic circuit breaker or by fuse isolator.
- (2) • Use an appropriate external transformer based on the voltage supply of the electronic board (see the identification label)
- (3) • The coil contactor, the relays and other inductive loads must be equipped with opportune RC filter.
- (4) • Before give the Start command supply the auxiliary voltage


DIMENSION AND FIXING HOLES

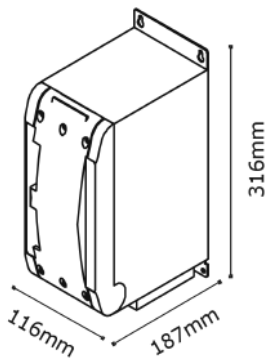




SIZE S09 25A÷150A

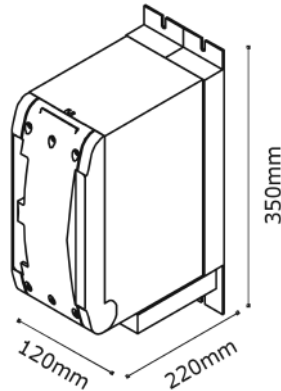

SIZE S10 200A

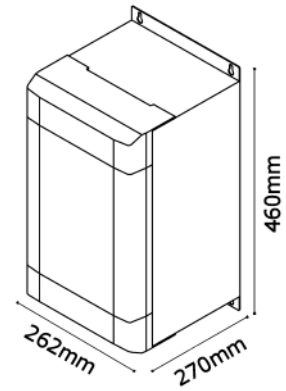

SIZE S14 275A÷700A

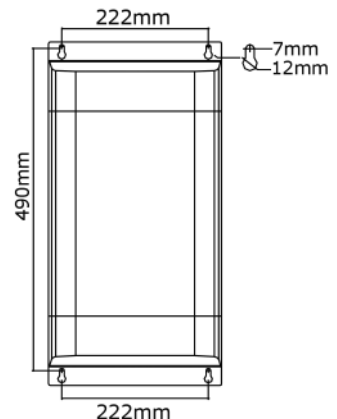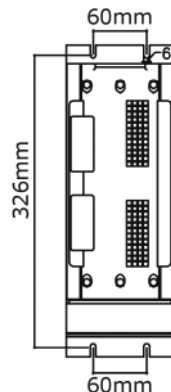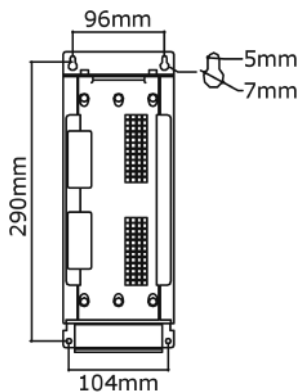

OUTPUT FEATURES (POWER DEVICE)

Current A	Voltage range (V)	Ripetitive peak reverse voltage (480V) (600V)		Latching current (mAeff)	Max peak one cycle (10msec.)	Leakage current	I ² T value for fusing tp=10msec.	Frequency range (Hz)	Power loss I=I _{nom} (W)	Isolation Voltage Vac
25A	330÷600V	1600	1600	450	500	15	1030	47÷70	60	2500
35A	330÷600V	1600	1600	450	500	15	1030	47÷70	84	2500
45A	330÷600V	1600	1600	450	1000	15	4750	47÷70	108	2500
75A	330÷600V	1600	1600	450	1000	15	4750	47÷70	180	2500
100A	330÷600V	1600	1600	450	1540	15	11300	47÷70	240	2500
125A	330÷600V	1600	1600	450	2000	15	19100	47÷70	300	2500
150A	330÷600V	1600	1600	300	5250	15	12800	47÷70	360	2500
200A	330÷600V	1600	1600	300	5250	15	12800	47÷70	480	2500
275A	330÷600V	1600	1600	300	4800	15	108000	47÷70	660	2500
400A	330÷600V	1600	1600	200	7800	15	300000	47÷70	960	2500
450A	330÷600V	1600	1600	200	7800	15	300000	47÷70	1080	2500
500A	330÷600V	1600	1600	200	8000	15	306000	47÷70	1200	2500
600A	330÷600V	1600	1600	1000	17800	15	1027000	47÷70	1440	2500
700A	330÷600V	1600	1600	1000	17800	15	1027000	47÷70	1680	2500

Fan Specification

Supply: 230V Standard	Input Power 17W
Supply: 115V Option	Input Power 14W

ORDERING CODES CD3000E 2PH

																Note 1
CD3000E 2PH																16
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
R	E	2	-	-	-	-	-	-	-	-	-	-	-	-	-	
4, 5, 6 Current		9 Input				12 Option				16 Load type/Connection						
Description code	Numeric code	Description code	Numeric code	Description code	Numeric code	Description code	Numeric code	Description code	Numeric code	Description code	Numeric code	Description code	Numeric code	Description code	Numeric code	
35A	0 3 5	SSR 3:30V dc	S	Control Mode		Resistive Load/ Delta Connection	1	0:10V	V	Retransmission 4:20mA	A	Resistive Load/ Star Connection	2	Resistive Load/ Star Connection + Neutral	7	
45A	0 4 5	4:20mA	A	Retransmission 0:10V	V	Transformer Load/ Delta Connection	3	75A	0 7 5	Fan Voltage equal to Aux. Voltage	3	Transformer Load/ Star Connection	4	Transformer Load/ Star Connection + Neutral	5	
75A	1 0 0	10KPot	K	CE EMC For European Market	0	Resistive Load/ Open delta	6	100A	1 0 0	cUL For American Market (Pending)	L					
125A	1 2 5	RS485	R													
150A	1 5 0	10 Firing				13 Fan Voltage				15 Manual						
225A	2 2 5	Description code	Numeric code	Description code	Numeric code	Description code	Numeric code	Description code	Numeric code	Description code	Numeric code	Description code	Numeric code	Description code	Numeric code	
300A	3 0 0	Zero Crossing ZC	Z	Control Mode		None	0	Italian Manual	1	None	0	Italian Manual	1	None	0	
350A	3 5 0	Single Cycle SC	C	Retransmission 4:20mA	A	Italian Manual	1	English Manual	2	Retransmission 0:10V	V	English Manual	2	English Manual	2	
400A	4 0 0	Burst Firing BF	B	Control Mode		English Manual	2	German Manual	3	Control Mode		German Manual	3	German Manual	3	
450A	4 5 0	Soft Start + Burst Firing S+BF	J	Retransmission 0:10V	V	German Manual	3	French Manual	4	Retransmission 0:10V	V	French Manual	4	French Manual	4	
500A	5 0 0	Delayed Triggering + Burst Firing DT+BF	D (2)	Control Mode		French Manual	4			Control Mode						
		Phase Angle PA	P	Open Loop	0					Control Mode						
		Soft Start + Phase Angle S+PA	E	Voltage Feedback V	U					Control Mode						
				Power Feedback VxI	W					Control Mode						
				Current Feedback I	I					Control Mode						

LEGEND
IF = Internal Fixed Fuse
CT = Current Transformer
HB = Heater Break Alarm

Note (1): After 16th digit write current and voltage of load inside brackets Ex. (190A-400V). Required if units are to be tuned to load.
 Note (2): DT+BF can be used to drive transformers coupled with normal resistance



CD Automation
 Tel: +44 (0)1323 811-100
 Email: info@cdautomation.co.uk

Web: www.cdautomation.co.uk/cd3000e-2ph