


## GENERAL DESCRIPTION



- Revo M has been specifically designed to be an Universal Unit
- RS485 Comm. MODBUS Protocol Standard
- Frontal Key Pad to configure the unit and to read V,I and Power
- Configurability via RS485, USB Port and frontal Key Pad
- Microprocessor based electronic circuit fully isolated from power
- Universal input signal: RS485,Pot, Analog and SSR
- Firing Mode: Zero Crossing and Burst Firing Mode with programmable cycle time
- Configurable Control Mode: V and VxI
- Heater Break alarm to diagnose partial or total load failure and Thyristor Short circuit
- Digital input configurable
- Fuse and Fuse Holder Standard
- Current transformer integrated in Fuse Holder
- Comply with EMC, cUL pending
- IP20 Protection
- DIN RAIL mounting

## TECHNICAL SPECIFICATION

<b>Voltage power supply</b>	From 24V to 480V Max (Std) or 600V on request		
<b>Voltage Frequency</b>	50 or 60 Hz no setting needed from 47 to 70 Hz		
<b>Nominal Current</b>	30A, 35A, 40A		
<b>Input Signal</b>	SSR (logic)	4:30Vdc	5mA Max (On ≥ 4Vdc Off ≤ 1Vdc);
	Voltage input	0:10Vdc	impedance 15 K ohm;
	Current input	0:20/4:20mA	impedance 100 Ohm;
<b>Digital input</b>	4:30V dc 5 mA Max (On > 4Vdc Off < 1Vdc)		
<b>Firing</b>	Burst Firing and Zero Crossing with possibility to set number of Burst and cycle time		
<b>Control Mode</b>	Voltage and Power selectable via frontal Key Pad, and RS485 or via Digital input to transfer from one control mode to another one to establish a control strategy.		
<b>Auxiliary Voltage Supply</b>	90:130Vac	8VA Max	
	170:265Vac	8VA Max	(Standard)
	230:345Vac	8VA Max	
	300:530Vac	8VA Max	(Standard)
	510:690Vac	8VA Max	
<b>Heater Break Alarm</b>	HB alarm setting on front unit or RS485 with possibility to set sensitivity. Relay output 0,5A at 110V		
<b>Mounting</b>	DIN RAIL Mounting or Panel Mounting		
<b>Operating Temperature</b>	40 °C without derating. Over this temperature see below derating curve		
<b>Storage temperature</b>	-25 °C to 70 °C Max		
<b>Altitude</b>	Over 1000 m of altitude reduce the nominal current of 2% for each 100m		
<b>Humidity</b>	From 5 to 95% without condense and ice		

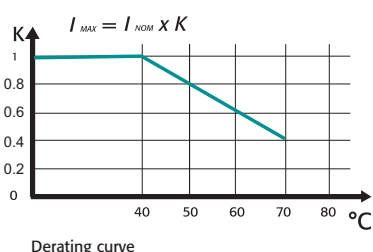

## OPTION'S FEATURES AND SPECIAL DETAILS

### HEATER BREAK ALARM (HB)

#### ON FRONT CABINET




The Heater Break circuit diagnostic partial or total load failure. It reads load resistance with an internal voltage transducer and current transformer to calculate the resistance value  $V/I$  circuit is compensated for voltage fluctuation, in fact a voltage variation has no influence on resistance value because  $V/I$  ratio remain constant.

On this unit is possible to set the nominal resistance value and the alarm sensitivity.

HB alarm in addition diagnostic the thyristor in short circuit

A normally open contact gives the alarm condition and an indication of the alarm type appears on display.

### BURST FIRING



This firing is performed digitally within the thyristor unit at zero volts, producing no EMC interference. Analogue input is necessary for BF and the number of complete cycles must be specified for 50% power demand. This value can be between 1 and 255 complete cycles, determining the speed of firing. When 1 is specified, the firing mode becomes Single Cycle (SC).

### CD EASY



This is a memory support tool that can be used by maintenance personnel on shop floor.

The user can copy the configuration of one unit and paste it into another. CD EASY is very simple with one push button to upload the configuration (Read and another to download the stored configuration (Write)

This tool can be used with our Remote service to mail the working configuration via internet.

### FIELD BUS MODULE



CD-RS Used to convert RS232 to RS422

TU-RS485-PDP Used to convert RS485 Modbus to Profibus DP


TU-RS485-DNE Used to convert RS485 Modbus to Devicenet

TU-RS485-ETH Used to convert RS485 Modbus to Ethernet

TU-RS485-CAN Used to convert RS485 Modbus to CAN

For more informations see "Field Bus Module" Bulletin

### POWER SCALING




It's a scaling factor of the input command signal and limit the output of Thyristor unit. This parameter can be adjusted from 1 to 99% via RS485 or by the front of the unit. If this parameter is set at 50% and the input signal is 100% the output become 50%. This feature is very useful to reduce the power when a zone has been oversized or when a temperature controller gives same reference to more unit along a furnace.

Imagine 3 zones with left and right one close to the door where in a continuous furnace the material come into and flow out. The profile of temperature along furnace is higher in central zone because there is less dispersion but if we scale its input we can have a flat profile.


### APPLICATIONS AND FOCUS ON:

- Infrared lamp.
- Autoclaves.
- Furnaces.
- Chemical
- Petrochemical
- Extrusion line.
- Dryers
- Climatic chambers
- Pharmaceutical

## Wiring connection M 2PH from 30÷40A

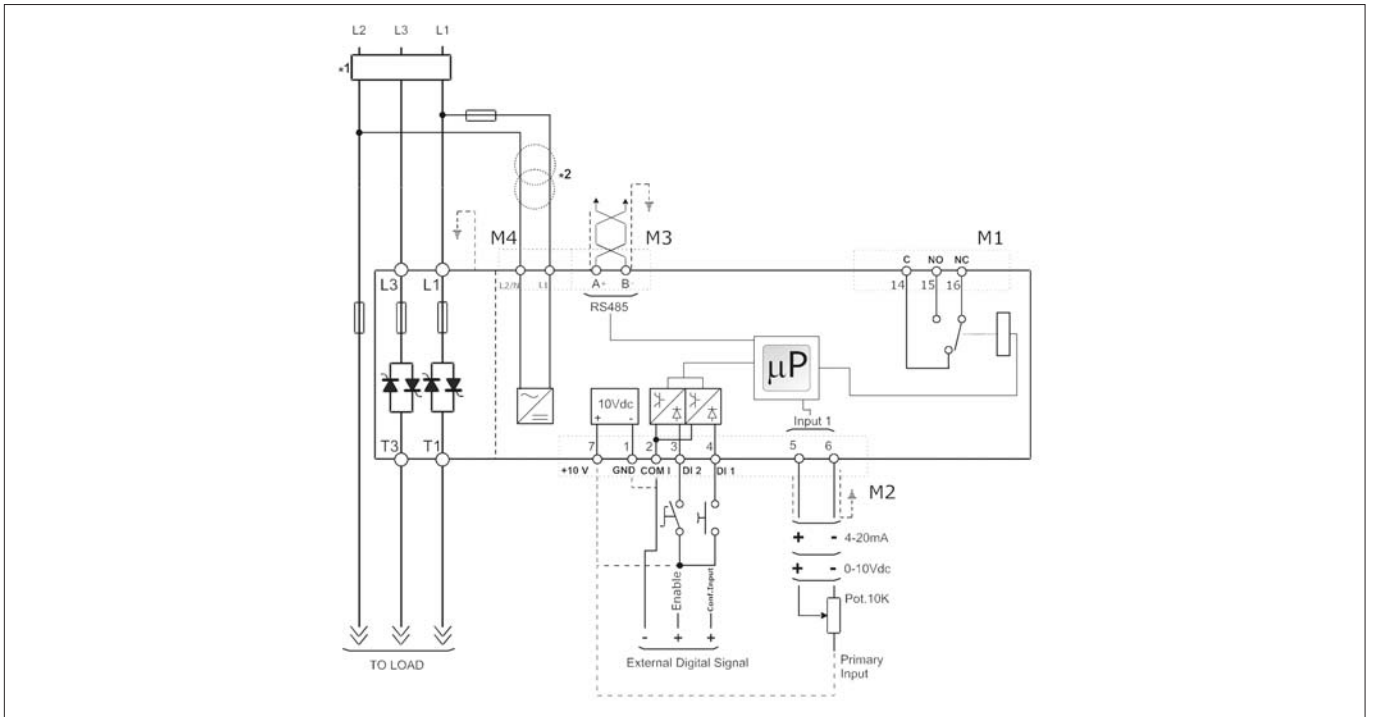


### LOAD TYPE



STAR without neutral  
Resistive or  
Infrared Lamps  
Long and  
medium waves

### LOAD TYPE




DELTA  
Resistive or  
Infrared Lamps  
Long and  
medium waves

### NOTE



- The user installation must be protecting by electromagnetic circuit breaker or by fuse isolator. The semiconductor I<sup>2</sup>t should be 20% less than power controller I<sup>2</sup>t. Semiconductor fuses are classified for UL as supplementar protection for semiconductor. They are note approved for branch circuit protection.
- The auxiliary voltage supply of the Revo M unit must be synchronized with loadvoltage power supply. If the Auxiliary Voltage (written on the identification label) is different from Supply Voltage (to the load), use an external transformer as designated.

## DIMENSION AND FIXING HOLES



SR10 W 108 mm. - H 121 mm. - D 185 mm. - kg. 1,76

**30A ÷ 40A**

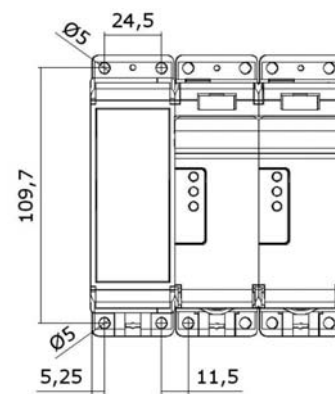

## OUTPUT FEATURES (POWER DEVICE)

Nominal current in continuous service:	See order code
Max peak current (10ms)	400A for unit type 030 600A for unit type 035 800A for unit type 040
Voltage range:	24+600V
Repetitive peak reverse voltage:	1200V (480V), 1600V (600V)
Latching current:	250mA
Leakage current:	15mA eff
I <sup>2</sup> t value tp=10msec:	780A <sup>2</sup> /S for unit type 030 1750A <sup>2</sup> /S for unit type 035 3110A <sup>2</sup> /S for unit type 040
Frequency range:	47-70Hz
Power loss (I=Inom):	76W for unit type 030 88W for unit type 035 100W for unit type 040
Isolation Voltage:	2500Vac

## ORDERING CODES REVO M 2PH

																Note 2																
																1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
REVO M 2PH																R	M	2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>4,5,6</b> Current		<b>8</b> Aux. Voltage supply		<b>11</b> Control Mode		<b>14</b> Approvals																										
Description code	Numeric code	Description code	Numeric code	Description code	Numeric code	Description code	Numeric code																									
30A	0 3 0	90:130V (3)	1	Open Loop	0	CE EMC For European Market	0																									
35A	0 3 5	170:265V (3)	2	Voltage Feed Back V	U	cUL For American Market, Pending	L																									
40A	0 4 0	230:345V (3)	3	Power Feed Back VxI	W																											
<b>7</b> Max Voltage		<b>9</b> Input		<b>12</b> Fuse & Option		<b>15</b> Manual																										
Description code	Numeric code	Description code	Numeric code	Description code	Numeric code	Description code	Numeric code																									
480V	4	SSR	S	Fuse + Fuse Holder	Y	None	0																									
600V	6	0:10V dc	V	Fuse + Fuse Holder +CT +HB	H	Italian Manual	1																									
		4:20mA	A			English Manual	2																									
		10KPot	K	<b>13</b> Fan Voltage		German Manual	3																									
		RS485	R	Description code	Numeric code	French Manual	4																									
				No Fan	0																											
<b>10</b> Firing		<b>16</b> Version																														
Description code	Numeric code	Description code	Numeric code																													
Zero Crossing ZC	Z	Std Version with two Fuses + Fuses Holder	1																													
Burst Firing BF	B	Third fuse on units (1)	2																													

**LEGEND**  
**CT** = Current Transformer  
**HB** = Heater Break Alarm

**Note (1):** If you need one REVOM-2PH with 3 Fuse&Fuse Holder, for dimension see REVOM-3PH.  
**Note (2):** After 16th digit write current and voltage of load inside brackets Ex. (40A-400V)  
**Note (3):** Load voltage must be included in Selected Auxiliary Voltage Range



**CD Automation**  
 Tel: +44 (0)1323 811-100  
 Email: info@cdautomation.co.uk

Web: www.cdautomation.co.uk/revo-m-2ph